

По мнению наблюдателей, жесткая и недальновидная политика ведущих поставщиков традиционных ERP-систем неизбежно приведет к укреплению позиций свободных ERP-систем, которые за короткое время станут сильными и конкурентоспособными продуктами.

Литература

- 1 Жунусов А. Свободные ERP-системы // ERP, <http://ko.com.ua/node/48453>.
- 2 Кухар А. В открытую: управленческие решения класса Open Source // Компьютерное обозрение, <http://ko.com.ua/node/48453>.
- 3 Свободные системы управления предприятием могут потеснить известные проприетарные // Интернет-портал OpenNET, <http://www.opennet.ru/opennews/art.shtml?num=24056>.
- 3 Мещеряко В. Gartner: Кризис? Да здравствует свободное ПО. // CNews», <http://www.cnews.ru/news/top/index.shtml?2008/10/10/322521>.
- 4 Маслинский К, Новодворский П, Курячий Г. История возникновения свободного ПО. http://hcar.altlinux.org/alt-docs/modules/freesoft_history.kirill/index.html.
- 5 Best of Open Source Software Awards 2009, <http://www.infoworld.com/d/open-source/best-open-source-software-awards-2009-628?page=0,5>
- 7 Compare Compiere editions, <http://compiere.com/products/compare-editions/index.php>
- 8 Openbravo Customer Stories, <http://www.openbravo.com/customers/>
- 9 Compiere: Not Just for Open Source Zealots and SMBs, <http://blogs.amrresearch.com/enterprisesoftware/2009/03/compiere-not-just-for-open-source-zealots-and-smb.html>

Түйін

Мақалада еркін ERP- жүйелері қарастырылған. Олар кәсіпорынның барлық қорларын тиімді басқару және жоспарлау және өндірісті, тауар таратуды және таратылу орындарын реттеуді, сатуды басқару құралы ретінде қарастырылады.

Özet

Makalede ücretsiz sistemlerinin etkin planlama ve satış, üretim, satın alma ve üretim, dağıtım ve işleme hizmetleri alanlarında müşteri emirlerinin yürütülmesi durumunda hesabın uygulanması için gerekli kurumsal tüm kaynakların kontrolü yöntemi araştırılmıştır.

Resume

In operation the free systems considered as methodology of effective planning and control of all resources of the enterprise which are necessary for implementation of sales, production, purchases and the account in case of execution of orders of clients in spheres of production, distribution and rendering services are.

UDK 519.7

Үс. Amirgaliyev,

Doctor of technical of science, professor,

D. Zhanibekov,

Student of Masters Program,

Suleyman Demirel University,

Almaty /Kazakhstan

Real time traffic light control using image processing

Annotation: As the problem of urban traffic congestion spreads, there is a pressing need for the introduction of advanced technology and equipment to improve the state-of-the-art of traffic control.

Traffic problems nowadays are increasing because of the growing number of vehicles and the limited resources provided by current infrastructures. The simplest way for controlling a traffic light uses timer for each phase. Another way is to use electronic sensors in order to detect vehicles, and produce signal that cycles. We propose a system for controlling the traffic light by image processing. The system will detect vehicles through images instead of using electronic sensors embedded in the pavement. A camera will be installed alongside the traffic light. It will capture image sequences. The image sequence will then be analysed using digital image processing for vehicle detection, and according to traffic conditions on the road traffic light can be controlled.

Keywords: Intelligent Transportation System (ITS), Traffic light, Image Processing, edge detection.

Automatic traffic monitoring and surveillance are important for road usage and management. Traffic parameter estimation has been an active research area for the development of intelligent Transportation systems (ITS). For ITS applications traffic- information needs to be collected and distributed. Various sensors have been employed to estimate traffic parameters for updating traffic information. Magnetic loop detectors have been the most used technologies, but their installation and maintenance are inconvenient and might become incompatible with future ITS infrastructure. It is well recognized that vision-based camera system are more versatile for traffic parameter estimation [1,4]. In addition to qualitative description of road congestion, image measurement can provide quantitative description of traffic status including speeds, vehicle counts, etc. Moreover, quantitative traffic parameters can give us complete traffic flow information, which fulfils the requirement of traffic management theory. Image tracking of moving vehicles can give us quantitative description of traffic flow.

In the present work the designed system aims to achieve the following.

- Distinguish the presence and absence of vehicles in road images;
- Signal the traffic light to go red if the road is empty;
- Signal the traffic light to go red if the maximum time for the green light has elapsed even if there are still vehicles present on the road.

Components of the current project: Hardware module; Software module; Interfacing.

Hardware Module. Image sensors: In this project a USB based web camera has been used.

Computer: A general purpose PC as a central unit for various image processing tasks has been used. Platform: consisting of a few toy vehicles and LEDs (prototype of the real world traffic light control system). Software Module

MATLAB version 7.8 as image processing software comprising of specialized modules that perform specific tasks has been used.

Interfacing. The interfacing between the hardware prototype and software module is done using parallel port of the personal computer. Parallel port driver has been installed in the PC for this purpose.

2. Methodology

Following are the steps involved:

- Image acquisition
- RGB to gray conversion
- Image enhancement
- Image matching using edge detection

Procedure Phase1:

- Initially image acquisition is done with the help of web camera;
- First image of the road is captured, when there is no traffic on the road;
- This empty road's image is saved as reference image at a particular location specified in the program;
- RGB to gray conversion is done on the reference image;
- Now gamma correction is done on the reference gray image to achieve image enhancement;
- Edge detection of this reference image is done thereafter with the help of Prewitt edge

detection operator.

Phase2:

- Images of the road are captured;
- RGB to gray conversion is done on the sequence of captured images;
- Now gamma correction is done on each of the captured gray image to achieve image enhancement;

Edge detection of these real time images of the road is now done with the help of prewitt edge detection operator Phase3:

- After edge detection procedure both reference and real time images are matched and traffic lights can be controlled based on percentage of matching;
- If the matching is between 0 to 10% - green light is on for 90 seconds. If the matching is between 10 to 50% - green light is on for 60 seconds. If the matching is between 50 to 70% - green light is on for 30 seconds. If the matching is between 70 to 90% - green light is on for 20 seconds. If the matching is between 90 to 100% - red light is on for 60 seconds.

3. Image Enhancement

The acquired image in RGB is first converted into gray. Now we want to bring our image in contrast to background so that a proper threshold level may be selected while binary conversion is carried out. This calls for image enhancement techniques. The objective of enhancement is to process an image so that result is more suitable than the original image for the specific application. There are many techniques that may be used to play with the features in an image but may not be used in every case. Listed below are a few fundamental functions used frequently for image enhancement:

- Linear (negative and identity transformations);
- Logarithmic (log and inverse log transformations);
- Power law transformations (gamma correction);
- Piecewise linear transformation functions.

Where S is output gray level, r is input gray level, c and g are positive constants. For various values of gamma applied on an acquired image we obtained the following graph shown in figure1.

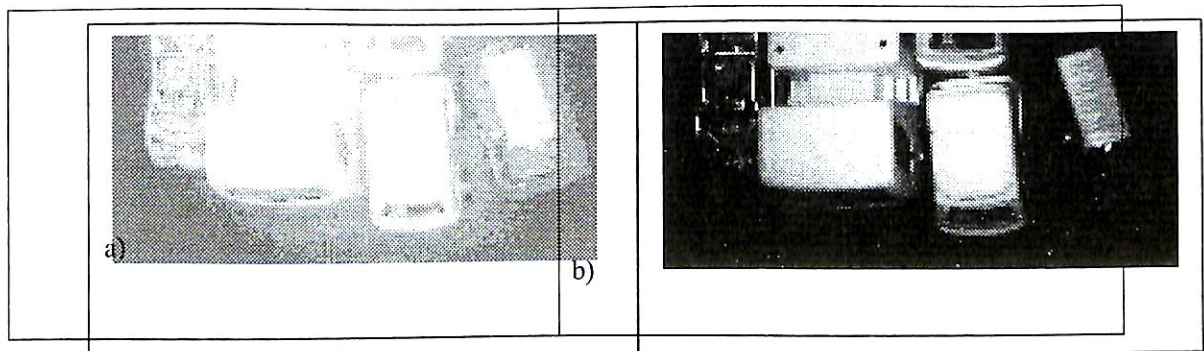


Figure1 - Values of gamma: a)Gamma = 0.2 b)Gamma = 4

From this figure it is evident that the power law curves with fractional values of g map a narrow range of dark input values into a wide range of output values with the opposite being true for higher values of input levels. It depicts the effect of increasing values of $g > 1$. The images are shown with $g = 1, 2, 3, 4, 5$ as may be seen, the figure with $g = 1$ gives the best results in terms of making fine details identifiable. As is evident the fractional values of g can not be used since these attempts show a reverse effect of brightening the image still further which we may find as undesirable for the present case.

4. Edge Detection and Image Matching

Step 1: Edge detection: Among the key features of an image i.e. edges, lines, and points, we

have used edge in our present work which can be detected from the abrupt change in the gray level. An edge essentially demarcates between two distinctly different regions, which means that an edge is the border between two different regions.

Here we are using edge detection method for image matching:

- Edge detection methods locate the pixels in the image that correspond to the edges of the objects seen in the image.

- The result is a binary image with the detected edge pixels.

- Common algorithms used are Sobel, Prewitt and Laplacian operators.

We have used gradient based Edge Detection that detects the edges by looking for the maximum and minimum in the first derivative of the image:

- First derivative is used to detect the presence of an edge at a point in an image.

- Sign of the second derivative is used to determine whether an edge pixel lies on the dark or light side of an edge.

The change in intensity level is measured by the gradient of the image. Since an image $f(z, y)$ is a two dimensional function, its gradient is a vector

$$1) \quad \begin{bmatrix} G_x \\ G_y \end{bmatrix} = \begin{bmatrix} \frac{df}{dx} \\ \frac{df}{dy} \end{bmatrix}$$

The magnitude of the gradient is given by $G[f(x,y)] = G_x^2 + G_y^2$

2) The direction of the gradient is $B(z, y) = \tan(G_y/G_x)$

3) Where the angle B is measured with respect to the X-axis. Gradient operators compute the change in gray level intensities and also the direction in which the change occurs. This is calculated by the difference in values of the neighboring pixels, i.e., the derivatives along the X-axis and Y-axis. In a two-dimensional image the gradients are approximated by

$$4) \quad G_x = f(i+1,j) - f(i,j), \quad G_y = f(i,j+1) - f(i,j)$$

5) Gradient operators require two masks, one to obtain the X-direction gradient and the other to obtain the Y-direction gradient. These two gradients are combined to obtain a vector quantity whose magnitude represents the strength of the edge gradient at a point in the image and whose angle represents the gradient angle.

Step 2: Image matching: Edge based matching is the process in which two representatives (edge) of the same objects are pared together. Any edge or its representation on one image is compared and evaluated against all the edges on the other image.

Edge detection of reference and the real time images has been done using Prewitt operator. Then these edge detected images are matched and accordingly the traffic light durations can be set.

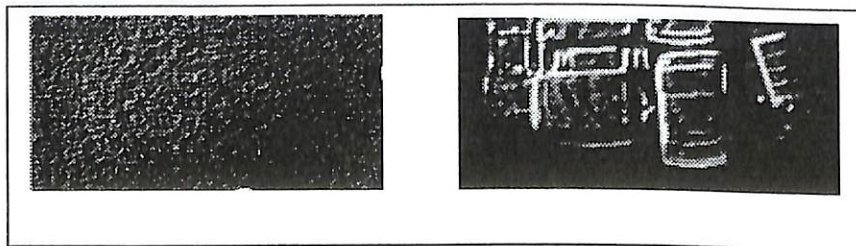


Figure 2 - Reference image captured image.

6. Summary and Conclusions

The study showed that image processing is a better technique to control the state change of the traffic light. It shows that it can reduce the traffic congestion and avoids the time being wasted by a green light on an empty road. It is also more consistent in detecting vehicle presence because it uses actual traffic images. It visualizes the reality so it functions much better than those systems that rely

on the detection of the vehicles' metal content. Overall, the system is good but it still needs improvement to achieve a hundred percent accuracy.

References

1 M. Fathy and M. Y. Siyal, "An image detection technique based on morphological edge detection and background differencing for real-time traffic analysis," *Pattern Recognition Letters*, vol. 16, pp. – Istanbul, 1995: 1321-1330p.

2 Rita Cucchiara, Massimo Piccardi and Paola Mello, "Image analysis and rule-based reasoning for a traffic monitoring system," *IEEE Trans. on Intelligent Transportation Systems*, Vol. 1, Issue 2, pp 119-130, 2000.

3 David Beymer, Philip McLauchlan, Benn Coifman, and Jitendra Malik, "A real-time computer vision system for measuring traffic parameters," *IEEE Conf. on Computer Vision and Pattern Recognition*, pp495 -501,1997..

4 V. Kastinaki, M. Zervakis, and K. Kalaitzakis, "A survey of video processing techniques for traffic applications," *Image and Vision Computing*, vol. 21, pp. 359-381, Apr 1 2003.

5 N. J. Ferrier, S. M. Rowe, A. Blake, "Real-time traffic monitoring," *Proceedings of the Second IEEE Workshop on Applications of Computer Vision*, pp.81 -88, 1994.

Түйін

Мақаладағы қарастырылған мәселе жол қиылысындағы кептелісті дұрыс басқару мақсатында кескіндерді өңдеу технологиясын қолдануды қажет етеді. Әр бағыттағы көліктердің жиналуын сәйкес кескіндер арқылы қарастыра отырып, бағдарламаларға сәйкес сигналдар беру арқылы оның жұмысын реттеуге болатындығы қарастырылған. Әрине қарастырылған мәселе әрі қарай бағдарламалық-аппараттық және теориялық ізденістерді қажет ететіні анық.

Özet

Bu çalışma, görüntü işleme trafik ışığı durum değişikliği kontrol etmek için daha iyi bir teknik olduğunu gösterdi. Onu trafik sıklığını azaltmak olduğunu gösterir ve boş bir yolda yeşil bir ışık tarafından harcanan zamanı önler. Aynı zamanda gerçek trafik görüntüleri kullanır, çünkü aracın varlığını saptamada daha tutarlıdır. Bu araç, metal içeriği tespit dayanan bu sistemleri daha iyi çalışır böylece gerçeklik görselleştirir. Genel olarak, sistem iyi ama yine de yüzde yüz doğruluk elde etmek için iyileştirilmesi gerekmektedir.

Резюме

Исследование показало, что обработка изображений является одним из возможностей для контроля изменения состояния светофора. В работе рассмотрены вопросы, связанные с управлением светофора на перекрестках с учетом загруженности дорог на разных направлениях. По изображению отслеживаются транспортные средства на разных направлениях, и передается сигнал светофору. В целом, для получения высокой точности, заложенная идея требует системной исследования, как в программно-аппаратном отношении, так и теоретическом.